

# Three-Phase String Inverters 4 kW to 10 kW

> Residential, Commercial, Solar Inverters



## Evershine TLC Series TLC4000/5000/6000/8000/10000


### Introduction

We believe that the world would be a better place if everybody had easy access to the cleanest energy from the roof of their homes and businesses. By creating simple, easy to use, affordable and reliable inverters we are revolutionizing access to solar power and delivering financial savings to your home or business. Ideal for large residential or small commercial applications, our Evershine TLC three phase inverter.


### Features

- Efficiency 98%
- Max. input voltage 1000V
- Graphical display
- Multiple Maximum Powerpoint Tracking
- IP65 protection class
- RS485 communications
- Online web monitoring via ZeverCom, ZeverCom WiFi or ZeverManager
- Grid management functions via ZeverCom, ZeverCom WiFi or ZeverManager
- Easy handling for installation and maintenance

### Conversion efficiency

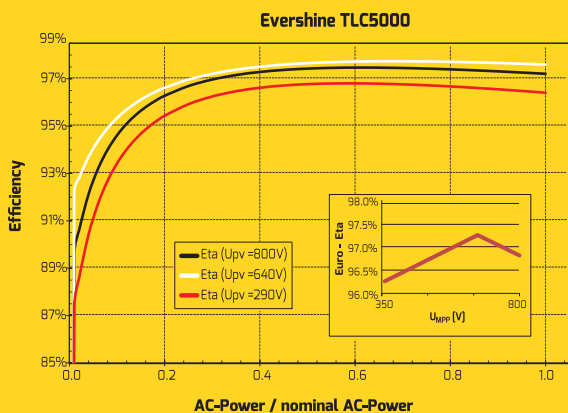

### Dimensions

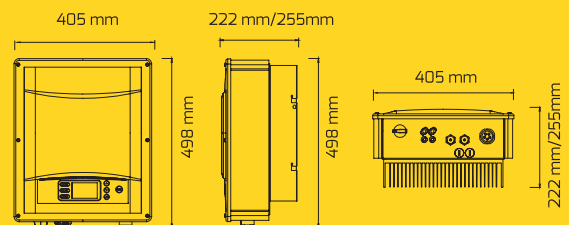

JIANGSU ZEVERSOLAR NEW ENERGY CO., LTD.

No.198 Xiangyang Road, Suzhou 215011, China • t +86 512 6937 0998 • f +86 512 6937 3159  
Sales: sales.china@zeversolar.com

For contact information in your region please visit [www.zeversolar.com](http://www.zeversolar.com)

**zeversolar**

# Three-Phase String Inverters 4 kW to 10 kW

Technical data	Evershine TLC4000	Evershine TLC5000	Evershine TLC6000	Evershine TLC8000	Evershine TLC10000
<b>Input (DC)</b>					
DC convertible power (@cosφ=1)	4650W	5800W	6300W	9250W	10500W
Max. input voltage	1000V			1000V	
MPP voltage range / rated input voltage	200-900V / 640V			200-900V / 640V	
Min. start voltage	250V			250V	
Min. feed-in power	12W			12W	
Max. input current per MPPT	11A / 11A			15A / 11A	15A / 11A
Number of MPPTs	2			2	2
Number of independent MPP inputs	1 / 1			2 / 1	2 / 1
<b>Output (AC)</b>					
Rated active power	4000W	5000W	6000W	8000W	10000W
Max. apparent AC power	4400VA	5500VA	6000VA	8800VA	10000VA
Nominal AC voltage	3/N/PE, 220/380V, 230/400V, 240/415V				
Nominal AC voltage range (line to line)	277-485V			277-520V	277-520V
AC power frequency / range	50 / +-5Hz			50 / +-5Hz	50 / +-5Hz
Rated power frequency / rated grid voltage	50Hz / 230V			50Hz / 230V	
Max. output current	3 x 6.8A	3 x 8.5A	3 x 9.2A	3 x 13.3A	3 x 15.1A
Power factor (@rated power)	> 0.99			> 0.99	
Adjustable displacement power factor	0.85 inductive ... 0.85 capacitive			0.85 inductive ... 0.85 capacitive	
Feed-in phases / connection phases	3 / 3			3 / 3	
Harmonic distortion (THD) at rated output	< 3%			< 3%	
<b>Efficiency</b>					
Max. efficiency / European weighted efficiency	98% / 97.5%			98.1% / 97.6%	
MPPT efficiency	99.50%			99.50%	
<b>Protective devices</b>					
DC isolator	○			○	
PV iso / Grid monitoring	● / ●			● / ●	
DC reverse polarity protection / AC short-circuit current capability	● / ●			● / ●	
GFCI function	●			●	
Protection class (according to IEC 62103) / overvoltage category (according to IEC 60664-1)	I / II (DC), III (AC)			I / II (DC), III (AC)	
<b>General data</b>					
Interfaces: RS485 / Ethernet / WIFI	● / - / -			● / - / -	
Display	graphical LCD			graphical LCD	
Dimensions (W x H x D)	405 x 498 x 222mm			405 x 498 x 255mm	
Weight	20kg			25kg	
Cooling concept	convection			convection	
Noise emission (typical)	< 40 dB(A)@1m			< 45 dB(A)@1m	
Installation	indoor & outdoor			indoor & outdoor	
Mounting information	wall mounting bracket			wall mounting bracket	
DC connection technology	SUNCLIX			SUNCLIX	
AC connection technology	plug-in			plug-in	
Operating temperature range	-25°C...+60°C / -13°F...+140°F			-25°C...+60°C / -13°F...+140°F	
Relative humidity (non-condensing)	0% ... 100%			0% ... 100%	
Max. operating altitude	2000m			2000m	
Degree of protection (according to IEC 60529)	IP65			IP65	
Climatic category (according to IEC 60721-3-4)	4K4H			4K4H	
Topology	transformerless			transformerless	
Self-consumption (night)	< 0.6W			< 0.6W	
Standby power	< 12W			< 12W	
Certificates and approvals (more available on request)	CE, IEC62109-1, IEC62109-2, VDE0126-1-1/A1:2012, VDE0126-1-1:2013, VDE-AR-N 4105, AS 4777.2, AS 4777.3, AS/NZS 3100, C10/11, NEN50438, G83/2, G59/3			CE, IEC62109-1, IEC62109-2, VDE-AR-N 4105, G83/2, G59/3, NEN50438, AS 4777.2, AS 4777.3, AS/NZS 3100	

● standard ○ optional - not available

As of July, 2015 / Technical data is subject to revisions.